

DOSATRON®

WATER POWERED DOSING TECHNOLOGY

Hygiene


Cleaning and Sanitizing Chemical Dispensers

Dosatrons are water-powered so no electricity is necessary. They compensate for flow and pressure changes providing consistent, repeatable results. Dosatrons are simple to use and easy to adjust allowing for flexible dosage rates, and they are easy to maintain saving you time and effort.

Our injectors are great for:

- Cleaners
- Sanitizers
- Lubricators



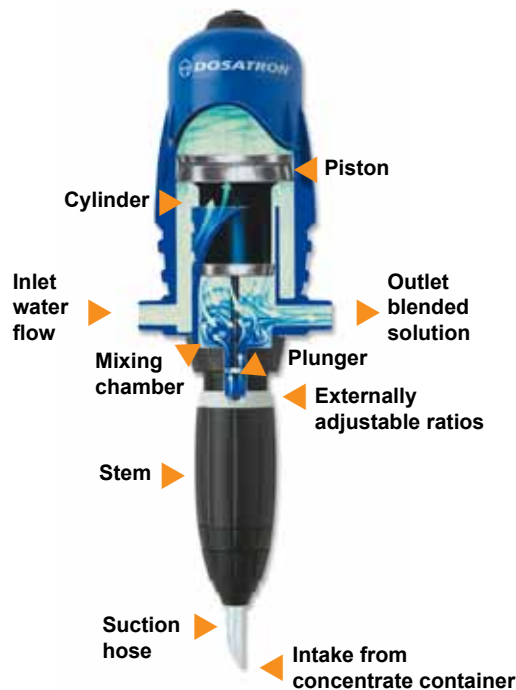









Pre-plumbed panels and locking cabinets are available.



To learn more about Dosatron call
800-523-8499
or visit
www.dosatronusa.com



UNIT SPECIFICATIONS

D14 Series Chemical Dispensers				
MODEL	D14MZ2*	D14MZ5	D14MZ10	D14MZ520
DILUTION RANGE	1:500 to 1:50	1:200 to 1:20	1:100 to 1:10	1:20 to 1:5
FLOW RANGE	0.05 TO 14 GPM	0.05 TO 14 GPM	0.05 TO 14 GPM	0.05 TO 9 GPM
INJECTION PERCENTS	0.2% to 2%	0.5% to 5%	1% to 10%	5 to 20%
PRESSURE RANGE	4.3 to 85 PSI	4.3 to 85 PSI	7 to 85 PSI	7 to 57 PSI
CONNECTIONS	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
RECOMMENDED ACCESSORY KIT	IPK34 - 14 GPM	IPK34 - 14 GPM	IPK34 - 14 GPM	IPK34 - 7 GPM
D45 Series Chemical Dispensers				
MODEL	D45RE15*	D45RE3	D45RE8	D45RE3000*
DILUTION RANGE	1:500 to 1:66	1:200 to 1:33	1:33 to 1:12	1:3000 to 1:1000
FLOW RANGE	0.4 to 20 GPM	0.4 to 20 GPM	0.4 to 20 GPM	0.4 to 20 GPM
INJECTION PERCENTS	0.2% to 1.5%	0.5% to 3%	3% to 8%	0.03% to 0.1%
PRESSURE RANGE	7 to 70 PSI	7 to 70 PSI	7 to 70 PSI	7 to 70 PSI
CONNECTIONS	1" NPT	1" NPT	1" NPT	1" NPT
RECOMMENDED ACCESSORY KIT	IPK100 - 20 GPM	IPK100 - 20 GPM	IPK100 - 20 GPM	IPK100 - 20 GPM
D25 Series and DI1500 Chemical Dispensers				
MODEL	D25RE2	D25RE1500	D25RE09*	DI1500*
DILUTION RANGE	1:500 to 1:50	1:1500 to 1:500	1:1000 to 1:112	1:1500 to 1:500
FLOW RANGE	0.05 to 11 GPM	0.05 to 11 GPM	0.05 to 11 GPM	0.05 to 11 GPM
INJECTION PERCENTS	0.2% to 2%	0.07% to 0.2%	0.1% to 0.9%	0.07% to 0.2%
PRESSURE RANGE	4.3 to 85 PSI	4.3 to 85 PSI	4.3 to 85 PSI	4.3 to 85 PSI
CONNECTIONS	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
RECOMMENDED ACCESSORY KIT	IPK34 - 10 GPM	IPK34 - 10 GPM	IPK34 - 10 GPM	IPK34 - 10 GPM

*Available in PAA enabled models.

All units include: mounting bracket, suction hose, weighted strainer, and operating manual. Please review the basic installation drawing for recommended accessories. Call for details.

MAXIMUM TEMPERATURE: 104 °F

Basic Installation



Customer Service

At Dosatron, we stand behind our units. Our world-class customer service team is always ready to assist you with service and support, for as long as you own your Dosatron.

Not sure what unit fits your needs? Give us a call for unit recommendations.

Want an easy preventive maintenance reminder? Sign up at www.dosatronusa.com/pm for Dosatron's Preventive Maintenance Program.

Ready to order? Call **800-523-8499** for a distributor near you.

 **DOSATRON®**

2090 Sunnydale Blvd.
Clearwater, FL 33765 USA
727-443-5404
(Fax) 727-447-0591

800-523-8499
www.dosatronusa.com



2011-03 PF 2007-31-IND005