

DOSATRON®

WATER POWERED DOSING TECHNOLOGY

FLOOR SCRUBBING

Floor Soap Costs Through the Roof?

Dosatron's pre-plumbed Floor Scrubber Fill Station is the solution you need for perfectly mixed chemical without waste.

Features	Benefits
Water-powered, non-electric	Reduced energy costs
Automatically compensates for changes in water flow and pressure	Offers consistent repeatable results
Simple to use and maintain	Less down time
Precise ratio adjuster	Controlled chemical costs with exact adjustability




Dosatron's Floor Scrubber Fill Station:

- **Easy to install** — Just mount the panel and connect a water line to the inlet.
- **Easy to adjust** — Adjust to the desired dilution rate with just a few twists of the dosing stem.
- **Easy to use** — Grab the gas nozzle and fill the scrubber.
- **Save time and money** — Fast filling saves labor costs.
- **Variety of flow ranges** — Flow ranges from 14 to 40 GPM available.

800-523-8499
www.dosatronusa.com

Unit Operation

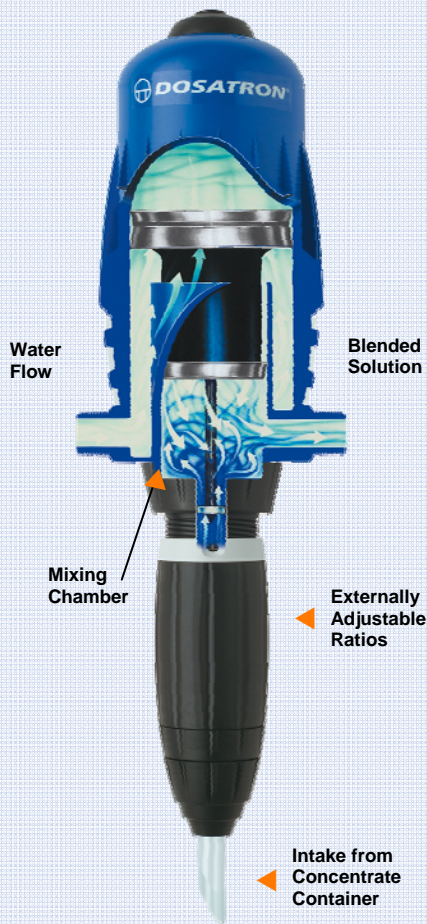

Unit Specifications

Dosatron's pre-plumbed floor scrubber fill station can be built with your choice of the injectors listed below.

D14MZ Series

- Housing material: **POLYPROPYLENE** (Standard) or **PVDF** (Optional) • Weight: 6 lbs • Dimensions: 19 1/8" X 6 5/16" • Connections: 3/4" Male NPT

Model	Dilution Range	Percentage	Flow Range	Pressure Range
D14MZ2	1:500 to 1:50	0.2% to 2%	0.05 to 14 GPM	4.3 to 85 PSI

D45RE Series

- Housing material: **POLYACETAL** (Standard) or **PVDF** (Optional) • Weight: 8 lbs
- Dimensions: 24" X 7.5" • Connections: 1" Male NPT

Model	Dilution Range	Percentage	Flow Range	Pressure Range
D45RE15	1:500 to 1:66	0.2% to 1.5%	0.40 to 20 GPM	7 to 70 PSI

D8R Series

- Housing material: **POLYACETAL** (Standard) or **PVDF** (Optional)
- Weight: 12 lbs • Dimensions: 23" X 12" • Connections: 1.5" Male NPT

Model	Dilution Range	Percentage	Flow Range	Pressure Range
D8R	1:500 to 1:50	0.2% to 2%	2.2 to 40 GPM	2 to 110 PSI

All units include: mounting bracket, suction tube, strainer and weight.
Please contact us for unit recommendations.

MAXIMUM TEMPERATURE: 104 °F

**To order or for
information call
800-523-8499**

Not sure what unit fits your needs?
Give us a call for unit recommendations.

Customer Service

At Dosatron, we stand behind our units. Our world-class customer service team is always ready to assist you with service and support, for as long as you own your Dosatron.

Preventive Maintenance Program

Sign up at www.dosatronusa.com/pm.



DOSATRON®

2090 Sunnydale Blvd., Clearwater, FL 33765 USA • 727-443-5404
Toll Free: 800-523-8499 • Fax: 727-447-0591 • www.dosatronusa.com

2010-04 2008-110-IND008