

DOSATRON®

WATER POWERED DOSING TECHNOLOGY

CAR WASH

Dosatron Chemical Dispensers

For all your car wash chemical metering needs

Features	Benefits
Water-powered, non-electric	Reduced energy costs
Automatically compensates for changes in water flow and pressure	Offers consistent repeatable results
Eliminates stainless steel tanks	Space saving
Simple to use and maintain	Less down time
Precise ratio adjuster	Controlled chemical costs with exact adjustability




IDEAL FOR TUNNEL, SELF SERVE AND AUTOMATIC

- **Presoaks**
- **Detergents / Soaps**
- **Drying Agents**
- **Bug Remover**
- **Drying Agents**
- **Waxes**



800-523-8499
www.dosatronusa.com

Unit Operation

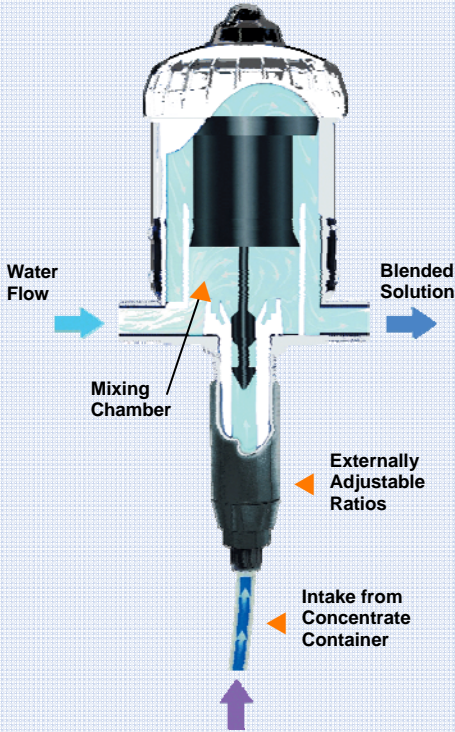

Pre-Plumbed Systems

Ask about Our Pre-Plumbed Systems



To order or for information call **800-523-8499**

Not sure what unit fits your needs? Give us a call for unit recommendations.

Customer Service

At Dosatron, we stand behind our units. Our world-class customer service team is always ready to assist you with service and support, for as long as you own your Dosatron.

Preventive Maintenance Program

Sign up at www.dosatronusa.com/pm.



Unit Specifications

D25RE Series 11 GPM • ALL PURPOSE DISPENSER

For presoaks, detergents, polishes and waxes

- Housing material: **PVDF**
- Dimensions: 14" X 6.25" • Weight: 4 lbs • Connections: 3/4" Male NPT • Max Temp: 104 °F

Model	Dilution Range	Flow Range	Pressure Range
D25RE2	500:1 to 50:1	0.05 to 11 GPM	4.3 to 85 PSI
D25RE1500	1500:1 to 500:1	0.05 to 11 GPM	4.3 to 85 PSI
D25RE5	100:1 to 20:1	0.05 to 11 GPM	4.3 to 85 PSI
D25RE10	33:1 to 10:1	0.05 to 8.8 GPM	4.3 to 57 PSI

NOT FOR USE WITH HYDROFLUORIC ACID COMPOUNDS | MAXIMUM TEMPERATURE: 104 °F

D14 Series • HYDROFLUORIC ACID PRODUCTS

For use with HF and ABF products

- Housing material: **PVDF** • No metal parts
- Dimensions: 19 1/8" X 6 5/16" • Weight: 5 lbs • Connections: 3/4" Male NPT • Max Temp: 104 °F


Model	Dilution Range	Flow Range	Pressure Range
D14MZ2	500:1 to 50:1	0.05 to 14 GPM	4.3 to 85 PSI
D14MZ10	100:1 to 10:1	0.05 to 14 GPM	7 to 85 PSI

All units include: mounting bracket, suction tube, strainer and weight. Please review the basic installation drawing for recommended accessories.

Accessories

Item	Description
CV34-PH	Check Valve
AKF5AP11T	T-Filter
AKF5AP11KIT	Y-Filter Kit
PR34	Pressure Regulator

Basic Installation

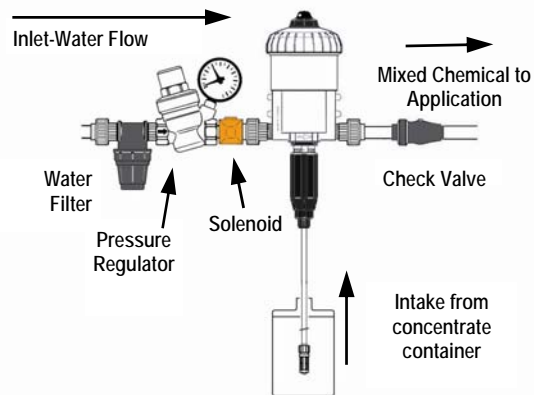

2090 Sunnysdale Blvd., Clearwater, FL 33765 USA • 727-443-5404
Toll Free: 800-523-8499 • Fax: 727-447-0591 • www.dosatronusa.com