



# DOSATRON®


WATER POWERED DOSING TECHNOLOGY

## 11 GPM: D25F Product Specifications

<b>Dilution Range:</b>	1:128 Fixed (.8%)
<b>Water Flow Range:</b>	.05 to 11 GPM
<b>Operating Pressure Range:</b>	4.3 to 85 PSI
<b>Available Housing Materials:</b>	<ul style="list-style-type: none"><li>• Polyacetal (Standard Blue)</li><li>• PVDF (White)</li></ul>
<b>Other Options:</b>	Side-inject
<b>Dimensions:</b>	14" x 6 1/4"
<b>Weight:</b>	4 lbs
<b>Connection Size:</b>	3/4" NPT
<b>Maximum Temperature:</b>	104° F
<b>Included Accessories:</b>	6 ft clear suction tube, strainer, weight, mounting bracket and operating manual
<b>Recommended Accessories:</b>	200 mesh filter, check valve, pressure regulator, flow restrictor.



## Basic Installation

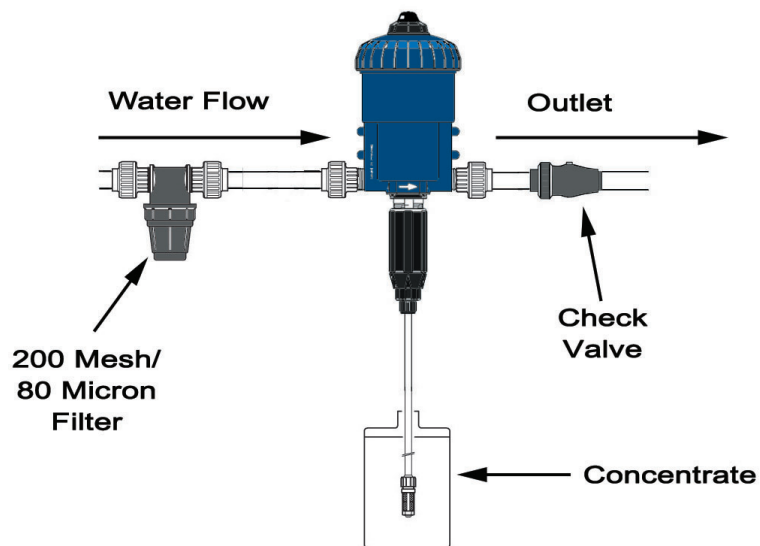

**Dosatron International**  
**2090 Sunnydale Blvd. • Clearwater, FL, USA**  
**800-523-8499 • [www.dosatronusa.com](http://www.dosatronusa.com)**

Dosatron International, Inc. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards by Dosatron International S.A.S., part of United Technologies Corporation, U.S.A.