



# DOSATRON®

WATER POWERED DOSING TECHNOLOGY

## 11 GPM: D25RE09


### Product Specifications

<b>Dilution Range:</b>	1:1000 to 1:112 (.1 to .9%)
<b>Water Flow Range:</b>	.05 to 11 GPM
<b>Operating Pressure Range:</b>	4.3 to 85 PSI
<b>Available Housing Materials:</b>	<ul style="list-style-type: none"> <li>• Polyacetal (Standard Blue)</li> <li>• PVDF (White)</li> </ul>
<b>Other Options:</b>	Side-inject
<b>Dimensions:</b>	14" x 6 1/4"
<b>Weight:</b>	4 lbs
<b>Connection Size:</b>	3/4" NPT
<b>Maximum Temperature:</b>	104° F
<b>Included Accessories:</b>	6 ft clear suction tube, strainer, weight, mounting bracket and operating manual
<b>Recommended Accessories:</b>	200 mesh filter, check valve, pressure regulator, flow restrictor.



## Recommended Installation

### IPK34 - 10 GPM Industrial Plumbing Kit

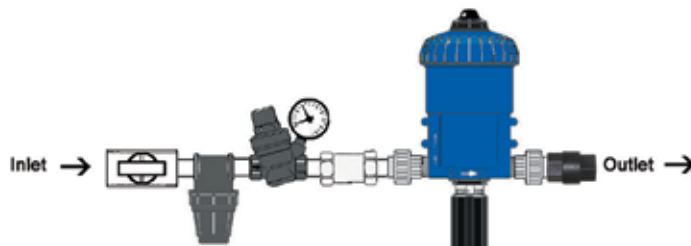

**IPK34 - 10 GPM**  
 3/4" schedule 80 PVC ball valve  
 3/4" poly 200 mesh tee filter  
 3/4" brass pressure regulator w/gauge  
 3/4" brass 10 GPM flow restrictor  
 3/4" check valve  
 3/4" x 2" schedule 80 PVC nipples (4)  
 3/4" union

For units:  
 D25RE1500  
 D25RE2  
 D25RE5  
 D25RE09  
 DI1500  
 DI16  
 DI150  
 DI110

**Dosatron International**  
**2090 Sunnydale Blvd. • Clearwater, FL, USA**  
**800-523-8499 • www.dosatronusa.com**