



# DOSATRON®

WATER POWERED DOSING TECHNOLOGY

## 11 GPM: DI1500


### Product Specifications

<b>Dilution Range:</b>	1:1500 to 1:500 (.07% to .2%)
<b>Water Flow Range:</b>	.05 to 11 GPM
<b>Operating Pressure Range:</b>	4.3 to 85 PSI
<b>Available Housing Materials:</b>	<ul style="list-style-type: none"><li>• Polyacetal (Standard Blue)</li><li>• PVDF (White)</li><li>• Hastelloy</li></ul>
<b>Dimensions:</b>	18 1/2" x 6 1/4"
<b>Weight:</b>	5 lbs
<b>Connection Size:</b>	3/4" NPT
<b>Maximum Temperature:</b>	104° F
<b>Included Accessories:</b>	4 ft clear suction tube, strainer, weight, mounting bracket and operating manual
<b>Recommended Accessories:</b>	200 mesh filter, check valve, pressure regulator, flow restrictor.



## Recommended Installation

### IPK34 - 10 GPM Industrial Plumbing Kit

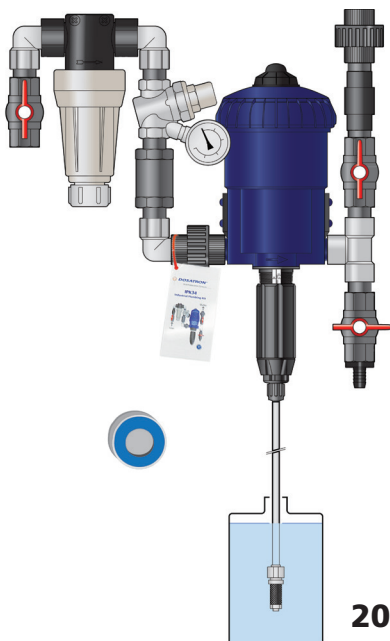

#### IPK34 - 10 GPM

- 3/4" schedule 80 PVC ball valve
- 3/4" poly 200 mesh tee filter
- 3/4" brass pressure regulator w/gauge
- 3/4" 10 GPM flow restrictor
- 3/4" polypropylene check valve
- 3/4" union
- 3/4" x 2" schedule 80 PVC fittings
- 3/4" x 1/2" barb fitting
- 3/4" T
- 3/4" street elbows
- Roll of Teflon tape
- Instruction card
- Zip tie

**Dosatron International**  
**2090 Sunnydale Blvd. • Clearwater, FL, USA**  
**800-523-8499 • [www.dosatronusa.com](http://www.dosatronusa.com)**