



DOSATRON®

WATER POWERED DOSING TECHNOLOGY


7 GPM: DI520 Product Specifications

Dilution Range:	1:20 to 1:5 (5% to 20%)
Water Flow Range:	.09 to 7 GPM
Operating Pressure Range:	7 to 57 PSI
Available Housing Materials:	<ul style="list-style-type: none"> • Polyacetal (Standard Blue) • PVDF (White) • Hastelloy
Dimensions:	18 1/2" x 6 1/4"
Weight:	5 lbs
Connection Size:	3/4" NPT
Maximum Temperature:	104° F
Included Accessories:	4 ft clear suction tube, strainer, weight, mounting bracket and operating manual
Recommended Accessories:	200 mesh filter, check valve, pressure regulator, flow restrictor.



Recommended Installation

IPK34 - 7 GPM Industrial Plumbing Kit

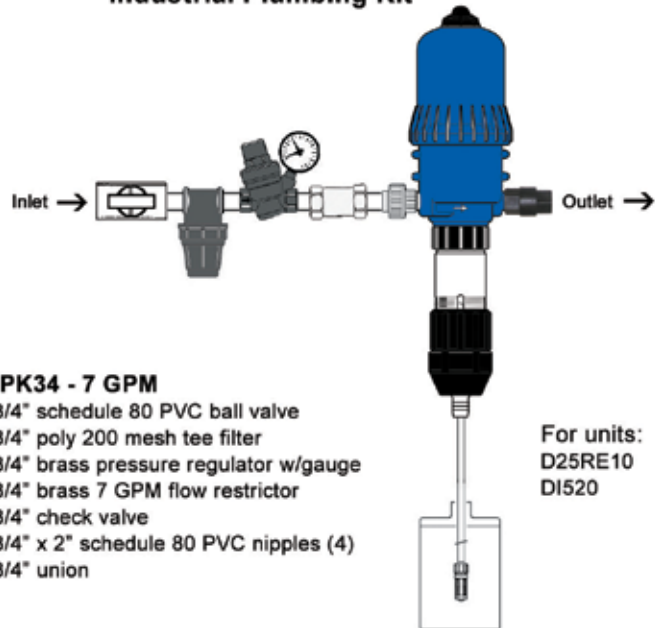

Dosatron International
2090 Sunnysdale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatronusa.com