



DOSATRON®

WATER POWERED DOSING TECHNOLOGY


14 GPM: D14MZ3000

Product Specifications

Dilution Range:	1:3000 to 1:333 (0.03% to 0.3%)
Water Flow Range:	0.05 to 14 GPM
Operating Pressure Range:	4.3 to 85 PSI
Available Housing Materials:	<ul style="list-style-type: none"> • Polypropylene (Standard Blue) • PVDF (White)
Dimensions:	21" x 6 5/16"
Weight:	6 lbs
Connection Size:	3/4" NPT
Maximum Temperature:	104° F
Included Accessories:	6' clear suction tube, strainer, weight, mounting bracket and operating manual
Recommended Accessories:	IPK34-14 GPM



Recommended Installation

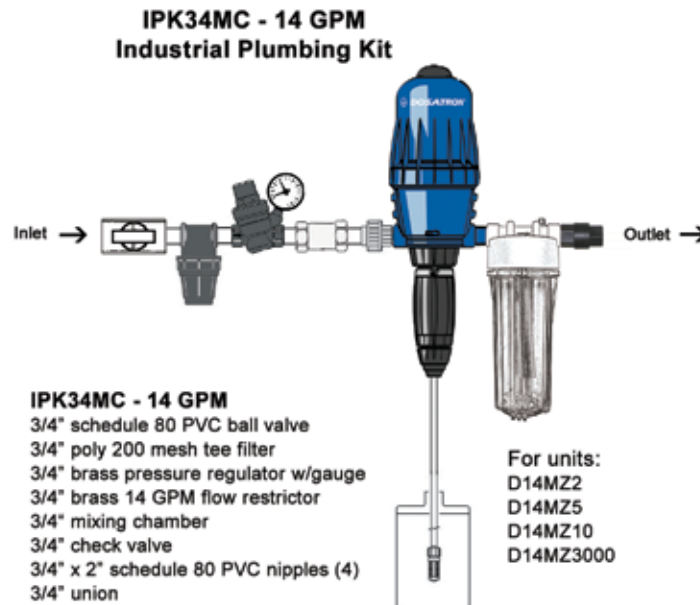

Dosatron International
2090 Sunnydale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatronusa.com

Dosatron International, Inc. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards by Dosatron International S.A.S., part of United Technologies Corporation, U.S.A.