



# DOSATRON®

WATER POWERED DOSING TECHNOLOGY

## 20 GPM: D45RE3


### Product Specifications

<b>Dilution Range:</b>	1:200 to 1:33 (.5% to 3%)
<b>Water Flow Range:</b>	.4 to 20 GPM
<b>Operating Pressure Range:</b>	7 to 70 PSI
<b>Available Housing Materials:</b>	<ul style="list-style-type: none"><li>• Polyacetal (Standard Blue)</li><li>• PVDF (White)</li></ul>
<b>Other Options:</b>	<ul style="list-style-type: none"><li>• Hastelloy</li><li>• Side-inject</li></ul>
<b>Dimensions:</b>	24" x 7 1/2"
<b>Weight:</b>	8 lbs
<b>Connection Size:</b>	1" NPT
<b>Maximum Temperature:</b>	104° F
<b>Included Accessories:</b>	6 ft clear suction tube, strainer, weight, mounting bracket and operating manual
<b>Recommended Accessories:</b>	200 mesh filter, check valve, pressure regulator, flow restrictor.



## Recommended Installation

### IPK100 - 20 GPM Industrial Plumbing Kit

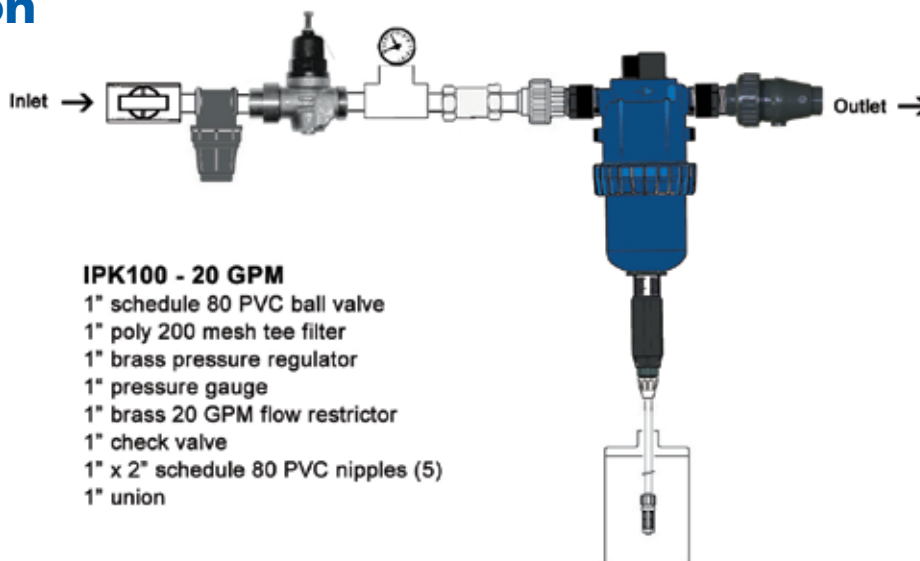

**Dosatron International**  
**2090 Sunnydale Blvd. • Clearwater, FL, USA**  
**800-523-8499 • [www.dosatronusa.com](http://www.dosatronusa.com)**