



DOSATRON®

WATER POWERED DOSING TECHNOLOGY

3 GPM: D07RE125


Product Specifications

Dilution Range:	1:667 to 1:80 (.15% to 1.25%)
Water Flow Range:	.02 to 3 GPM
Operating Pressure Range:	4.3 to 85 PSI
Available Housing Materials:	<ul style="list-style-type: none">• Polyacetal (Standard Blue)• PVDF (White)
Dimensions:	10" x 4 1/2"
Weight:	2 lbs
Connection Size:	3/4" NPT
Maximum Temperature:	104° F
Included Accessories:	6 ft clear suction tube, strainer, weight, mounting bracket and operating manual
Recommended Accessories:	200 mesh filter, check valve, pressure regulator, flow restrictor.



Recommended Installation

IPK34MC - 3 GPM Industrial Plumbing Kit

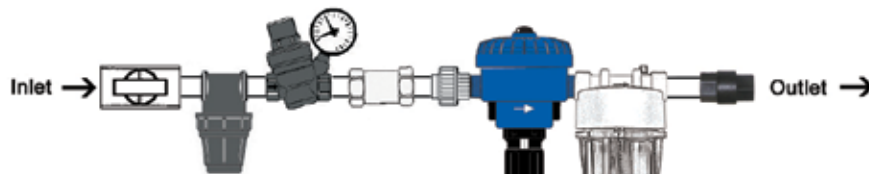

IPK34MC - 3 GPM

- 3/4" schedule 80 PVC ball valve
- 3/4" poly 200 mesh tee filter
- 3/4" brass pressure regulator w/gauge
- 3/4" brass 3 GPM flow restrictor
- 3/4" mixing chamber
- 3/4" check valve
- 3/4" x 2" schedule 80 PVC nipples (4)
- 3/4" union

For units:
D07RE125
D07RE5

Dosatron International
2090 Sunnydale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatronusa.com