



DOSATRON®

WATER POWERED DOSING TECHNOLOGY


8.8 GPM: D25RE10

Product Specifications

Dilution Range:	1:33 to 1:10 (3% to 10%)
Water Flow Range:	.05 to 8.8 GPM
Operating Pressure Range:	4.3 to 58 PSI
Available Housing Materials:	<ul style="list-style-type: none">• Polyacetal (Standard Blue)• PVDF (White)
Other Options:	Side-inject
Dimensions:	14" x 6 1/4"
Weight:	4 lbs
Connection Size:	3/4"
Maximum Temperature:	104° F
Included Accessories:	4 ft clear suction tube, strainer, weight, mounting bracket and operating manual
Recommended Accessories:	200 mesh filter, check valve, pressure regulator, flow restrictor.



Basic Installation

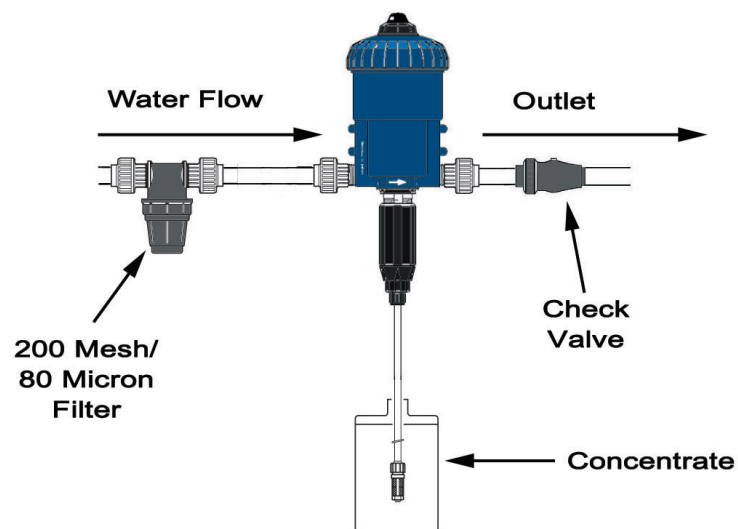

Dosatron International
2090 Sunnydale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatronusa.com