



DOSATRON®

WATER POWERED DOSING TECHNOLOGY

9 GPM: D14MZ520


Product Specifications

Dilution Range:	1:20 to 1:5 (5% to 20%)
Water Flow Range:	0.05 to 9 GPM
Operating Pressure Range:	7 to 57 PSI
Available Housing Materials:	<ul style="list-style-type: none">• Polypropylene (Standard Blue)• PVDF (White)
Dimensions:	26 1/8" x 6 5/16"
Weight:	8.8 lbs
Connection Size:	3/4" NPT
Maximum Temperature:	104° F
Included Accessories:	6' clear suction tube, strainer, weight, mounting bracket and operating manual
Recommended Accessories:	IPK34



Recommended Installation

IPK34 - 7 GPM Industrial Plumbing Kit

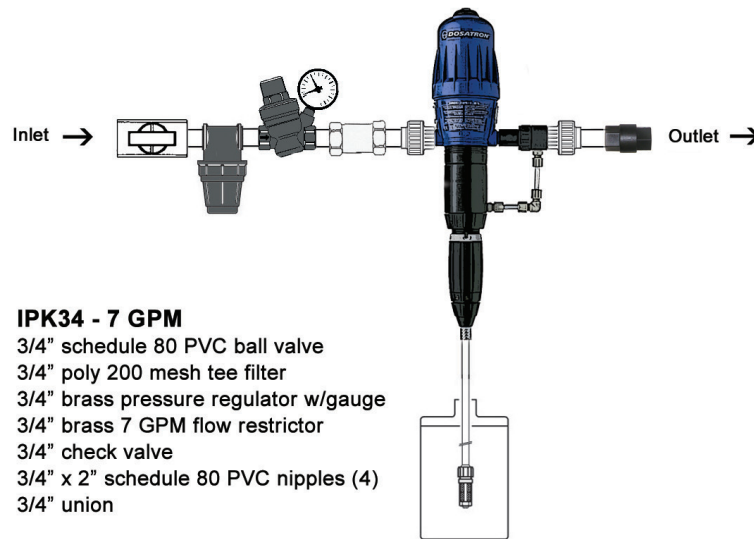

IPK34 - 7 GPM

- 3/4" schedule 80 PVC ball valve
- 3/4" poly 200 mesh tee filter
- 3/4" brass pressure regulator w/gauge
- 3/4" brass 7 GPM flow restrictor
- 3/4" check valve
- 3/4" x 2" schedule 80 PVC nipples (4)
- 3/4" union

Dosatron International
2090 Sunnydale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatronusa.com