



DOSATRON®

WATER POWERED DOSING TECHNOLOGY

14 GPM: D14MZ3000

Product Specifications


Call 800-523-8499 to order the Dosatron for your specific application

Dilution Range:	1:3000 to 1:333 (0.03% to 0.3%)
Water Flow Range:	0.05 to 14 GPM
Operating Pressure Range:	4.3 to 85 PSI
Available Housing Materials:	<ul style="list-style-type: none"> • Polypropylene (Standard Blue) • PVDF (White)
Dimensions:	21" x 6 5/16"
Weight:	6 lbs
Connection Size:	3/4" NPT
Maximum Temperature:	104° F
Included Accessories:	6' clear suction tube, strainer, weight, mounting bracket and operating manual
Recommended Accessories:	IPK34-14 GPM, Bypass - part #: MPDI196



Recommended Installation

IPK34 - 14 GPM Industrial Plumbing Kit

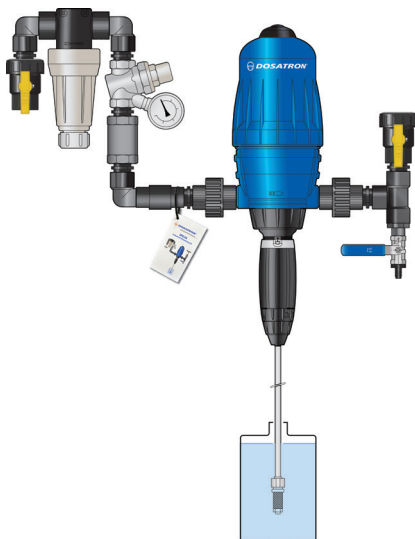

- 3/4" polypropylene Banjo single union ball valve
- 1/2" stainless steel ball valve
- 3/4" poly 200 mesh tee filter
- 3/4" brass pressure regulator w/gauge
- 3/4" 14 GPM flow restrictor
- 3/4" polypropylene check valve
- 3/4" union schedule 80 PVC
- 3/4" x 2" Banjo polypropylene fittings
- 1/2" x 2" Banjo polypropylene fittings
- 1/2" x 1/2" Banjo barb fitting
- 3/4" male to 1/2" female Banjo reducer bushing
- 3/4" Banjo T
- 3/4" Banjo street elbows
- Roll of Teflon tape
- Instruction card
- Zip tie



Dosatron International
2090 Sunnydale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatronusa.com

Dosatron International, Inc. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards.