



DOSATRON®

WATER POWERED DOSING TECHNOLOGY


40 GPM: D40WL3000NAF - NSF/ANSI 61 & 372 Certified Product Specifications

Call 800-523-8499 to order the Dosatron for your specific application

Dilution Range:	1:3000 to 1:800 (0.03% to 0.125%)
Water Flow Range:	2.2 to 40 GPM
Operating Pressure Range:	2.2 to 116 PSI
Available Housing Materials:	Polypropylene
Dimensions:	25 1/4" x 8 1/2"
Weight:	12 lbs
Connection Size:	1 1/2" NPT
Maximum Temperature:	104° F
Included Accessories:	6' clear suction tube, weighted strainer, mounting bracket and quick start guide



Bypass Installation

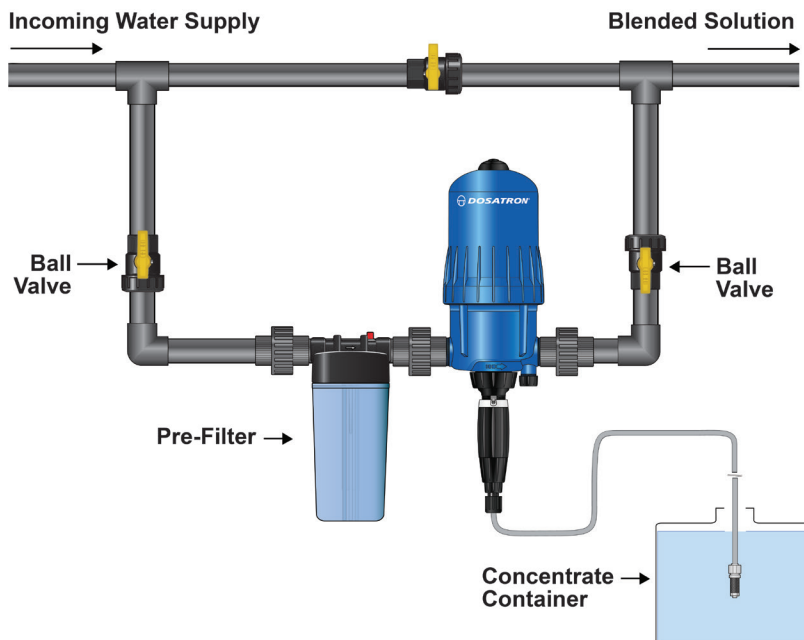

Certified to
NSF/ANSI 61 & 372



**Dosatron International • 2090 Sunnydale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatronusa.com**

Dosatron International, Inc. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards.