



DOSATRON®

WATER POWERED DOSING TECHNOLOGY


Compost Tea

Organic Material Injectors

With a Dosatron injector, your plants get the right amount of nutrients every time. Dosatron injectors are water-powered so no electricity is necessary and they compensate for flow and pressure changes providing consistent, repeatable results. Dosatrons are simple to use and easy to adjust allowing for flexible dosage rates, and they are easy to maintain saving you time and effort.

Our injectors are great for:

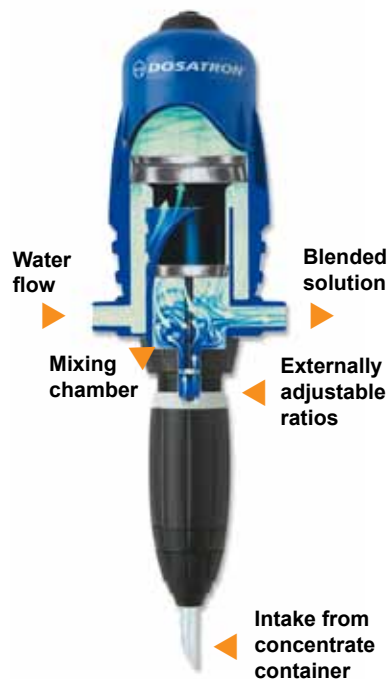


- Compost Tea
- Organic Fertilizers
- Disinfectants
- Hydroponics




To learn more about Dosatron call
800-523-8499
or visit
www.dosatronusa.com



UNIT SPECIFICATIONS

All Purpose Fertilizer Injectors			
	MODEL	D14MZ2	D14MZ10
MAX. FLOW	14 GPM	14 GPM	9 GPM
MIN. FLOW	0.05 GPM	0.05 GPM	0.05 GPM
INJECTION PERCENTS	0.2% to 2%	1% to 10%	5% to 20%
INJECTION RATIO	1:500 to 1:50	1:100 to 1:10	1:20 to 1:5
PRESSURE RANGE	4.3 to 85 PSI	7 to 85 PSI	7 to 57 PSI
CONNECTIONS	3/4" NPT	3/4" NPT	3/4" NPT

Basic Installation

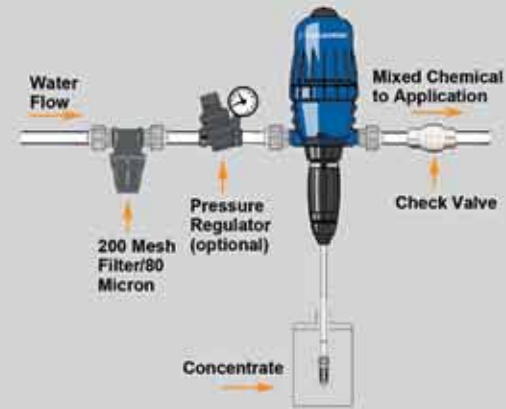





Customer Service

At Dosatron, we stand behind our units. Our world-class customer service team is always ready to assist you with service and support, for as long as you own your Dosatron.

Not sure what unit fits your needs? Give us a call for unit recommendations.

Want an easy preventive maintenance reminder? Sign up at www.dosatronusa.com/pm for Dosatron's Preventive Maintenance Program.

Ready to order? Call **800-523-8499** for a distributor near you.

All Purpose Fertilizer Injectors				
	MODEL	D45RE8	D45RE15	D8R
MAX. FLOW	20 GPM	20 GPM	40 GPM	40 GPM
MIN. FLOW	0.4 GPM	0.4 GPM	2.2 GPM	2.2 GPM
INJECTION PERCENTS	3% to 8%	0.2% to 1.5%	0.2% to 2%	1% to 5%
INJECTION RATIO	1:33 to 1:12	1:500 to 1:66	1:500 to 1:50	1:100 to 1:20
PRESSURE RANGE	7 to 70 PSI	7 to 70 PSI	2 to 110 PSI	2 to 110 PSI
CONNECTIONS	1" NPT	1" NPT	1 1/2" NPT	1 1/2" NPT

All units include: mounting bracket, suction hose, weighted strainer, and operating manual.

Please review the basic installation drawing for recommended accessories.

MAXIMUM TEMPERATURE: 104 °F

CARTS



◀ Li'l Bud-D - 5-Gallon

- Polyethylene construction
- 10" tires for maximum mobility
- 5-gal bucket with lid
- Dimensions: 44.5" high, 19" wide, and 22" deep

Part #: HS15-5 - Includes: cart and 5-gallon bucket with lid. (Dosatron unit and Quick Hook-Up Kit sold separately.) Part #: HSPK58LB - 14, 11, and 7 GPM Quick Hook-Up Kit

DosaCart - 15-Gallon

- Polyethylene tank construction
- Crash bar protects Dosatron unit from damage
- 15-gallon tank
- 10" tires for maximum mobility
- Dimensions: 45.5" high, 16" wide, and 20" deep

Part #: HS15-16 - Includes: cart, bracket and crash bar. (Dosatron unit and Quick Hook-Up Kit sold separately.) Part #: HSPK58 - 14 and 11 GPM Quick Hook-Up Kit. Part #: HSPK45 - 20 GPM Quick Hook-Up Kit



2090 Sunnydale Blvd.
Clearwater, FL 33765 USA
727-443-5404
(Fax) 727-447-0591

800-523-8499
www.dosatronusa.com



2011-08 PF 2008-93-HORT022